



**Quadro 2700K 25° 350mA CRI80 LED**  
**Einbaustr. 8W chrommatt.m.Konv.**  
Article nr.: ALU53479UWW

for indoor use, IP 20 · · housing: diecast aluminum, glass reflector · housing color: chrome matt · 30° swivelling · beam angle: 25° · power: 8 W · light color: 2700 K · luminous flux: 900 lm · CRI: >80 · lifespan L70B50: >= 50,000 h · input: 350 mA DC · protection class III, MM · · installation depth: 35 mm · ceiling cut-out: 68 mm · outer dimensions: 82 x 82 mm · including LED converter · this product contains a light source of energy efficiency class E

TECHNICAL DATA

|                         |                          |
|-------------------------|--------------------------|
| Unit Code               | pcs                      |
| BAR code                | 4012094434797            |
| Housing colour          | Chrom matt               |
| Length                  | 82.00 mm                 |
| Width                   | 82.00 mm                 |
| Height                  | 25.00 mm                 |
| Hole size               | 68 mm                    |
| Depth in ceiling        | 35.00 mm                 |
| LED colour              | ca. 2700K ultra warmweiß |
| Lightoutput per fixture | 900.00 lm                |






**Quadro 2700K 25° 350mA CRI80 LED**  
**Einbaustr. 8W chrommatt.m.Konv.**  
 Article nr.: ALU53479UWW

## TECHNICAL DATA

|                   |               |
|-------------------|---------------|
| Lamp              | Inklusive LED |
| IP rating         | 20            |
| Power             | 8 W           |
| Current mA        | 350 mA        |
| Lamp base         | ohne          |
| Amount of LED     | 1             |
| Material          | Aluminium     |
| Temperature range | -20 - 40      |
| CRI               | ≥ 80          |
| Lifetime L70B50   | 50.000 h      |

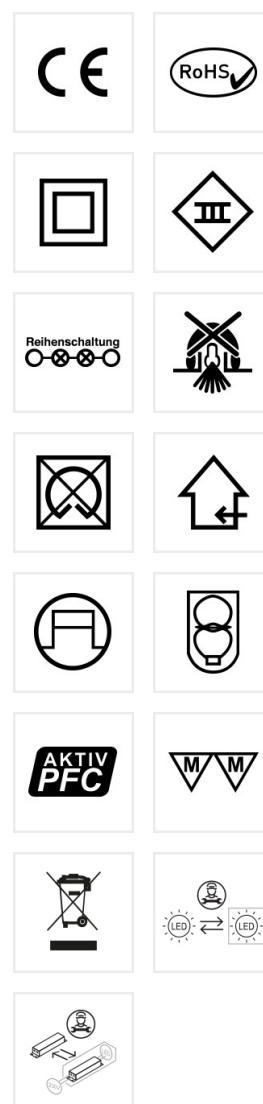



**Quadro 2700K 25° 350mA CRI80 LED**  
**Einbaustr. 8W chrommatt.m.Konv.**  
Article nr.: ALU53479UWW

## TECHNICAL DRAWING

