


**2000-2800K 40° 350mA CRI80 m.Scheibe
.LED Einbaustr. 7W chrom o.Konverter**
Article nr.: ALU57354DTWOK

for indoor use, IP 20 · · housing: diecast aluminum, glass reflector, protective glass · housing color: chrome · 30° swivelling · beam angle: 40° · power: 7 W · light color: 2200 - 2800 K DimToWarm · luminous flux: 580 lm · CRI: >80 · lifetime L70: >= 39.000 h · input: 350 mA DC · protection class III · · installation depth: 40 mm · ceiling cut-out: 68 mm · outer diameter: 82 mm · energie efficiency class: A+ · not included LED converter

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094071541
Housing colour	Chrom
Height	34.00 mm
Outer diameter	82 mm
Hole size	68 mm
Depth in ceiling	40.00 mm
LED colour	2000-2800K DTW
Lightoutput per fixture	580.00 lm
Lamp	Inklusive LED



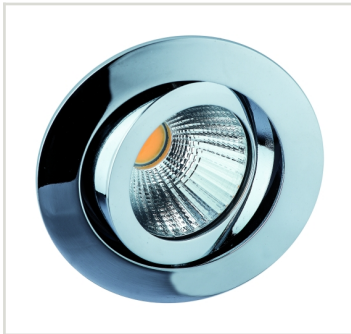


**2000-2800K 40° 350mA CRI80 m.Scheibe
.LED Einbaustr. 7W chrom o.Konverter**
Article nr.: ALU57354DTWOK

TECHNICAL DATA

IP rating	20
Power	7 W
Current mA	350 mA
Lamp base	ohne
Amount of LED	1
Material	Gehäuse Aluminium
Temperature range	-20 - 40
Energy efficiency class	A+
CRI	≥ 80



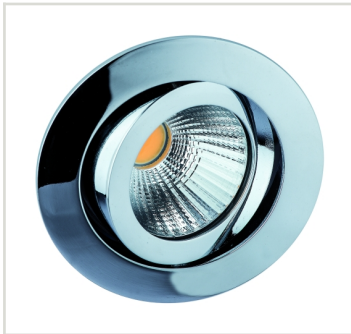

2000-2800K 40° 350mA CRI80 m.Scheibe
.LED Einbaustr. 7W chrom o.Konverter
Article nr.: ALU57354DTWOK

TECHNICAL DRAWING

