



**4000K 25° 350mA CRI90 m.Scheibe LED
Einbaustr. 8W eisengeb.m.Konv.dim**
Article nr.: ALU57355NWD

for indoor use, IP 20 · · housing: diecast aluminum, glass reflector, protective glass · housing color: iron brushed · 30° swivelling · beam angle: 25° · power: 8 W · light color: 4000 K · luminous flux: 840 lm · CRI: >90 · lifespan L70B50: >= 50,000 h · input: 350 mA DC · protection class III, MM · · installation depth: 40 mm · ceiling cut-out: 68 mm · outer diameter: 82 mm · including LED converter dimmable via tronic dimmer · this product contains a light source of energy efficiency class E

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094272559
Housing colour	Eisen-gebürstet
Height	31.00 mm
Outer diameter	82 mm
Hole size	68 mm
Depth in ceiling	40.00 mm
LED colour	ca. 4000K neutralweiß
Lightoutput per fixture	840.00 lm
Lamp	Inklusive LED






4000K 25° 350mA CRI90 m.Scheibe LED
Einbaustr. 8W eisengeb.m.Konv.dim
Article nr.: ALU57355NWD

TECHNICAL DATA

IP rating	20
Power	8 W
Current mA	350 mA
Lamp base	ohne
Amount of LED	1
Material	Aluminium
Temperature range	-20 - 40
CRI	≥ 90
Lifetime L70B50	50.000 h

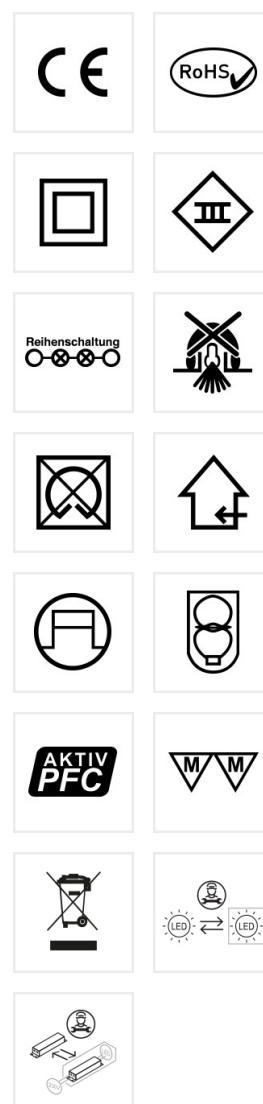



4000K 25° 350mA CRI90 m.Scheibe LED
Einbaustr. 8W eisengeb.m.Konv.dim
Article nr.: ALU57355NWD

TECHNICAL DRAWING

